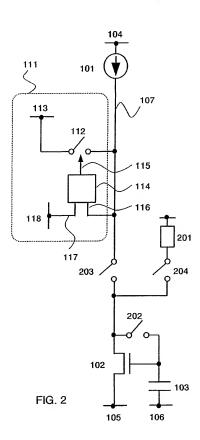
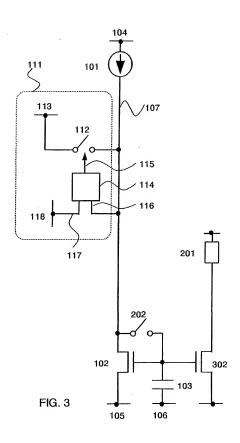
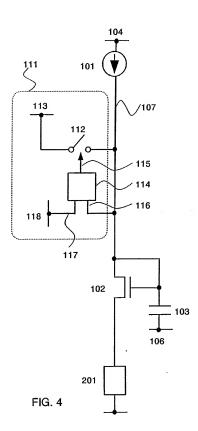
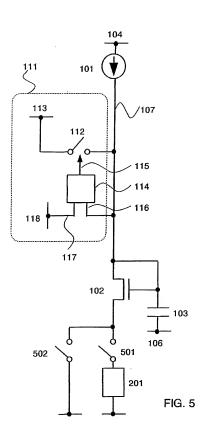


FIG. 1














FIG. 6

## Page 7 of 45 SEMICONDUCTOR DEVICE AND DRIVING METHOD OF THE SAME Hajime KIMURA 12732-325USI / PCTUS7354

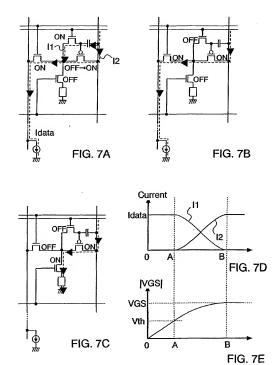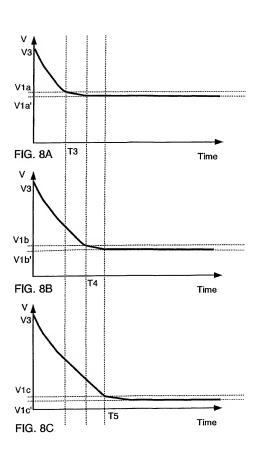

•



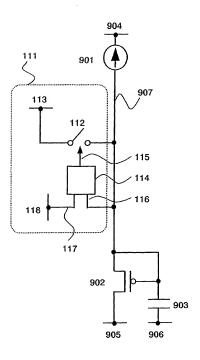


FIG. 9

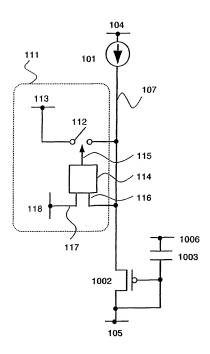


FIG. 10

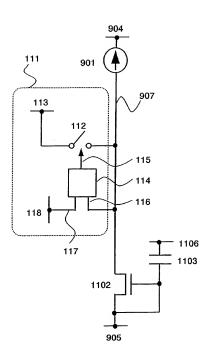


FIG. 11

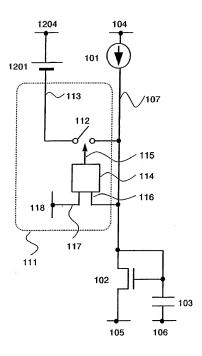


FIG. 12

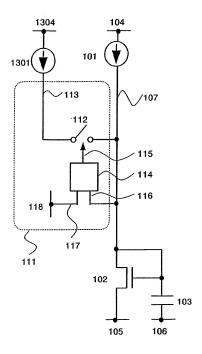


FIG. 13

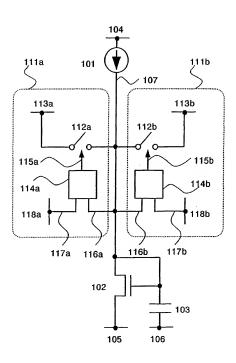


FIG. 14




FIG. 15




FIG. 16




FIG. 17

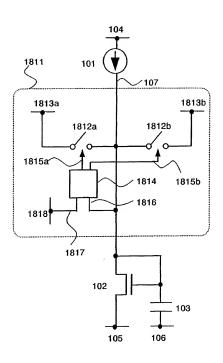


FIG. 18

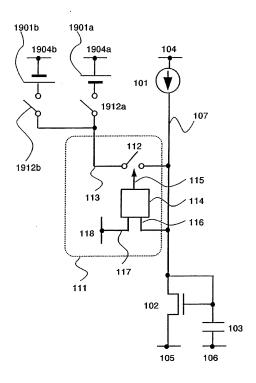


FIG. 19

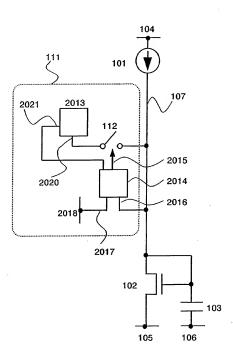


FIG. 20

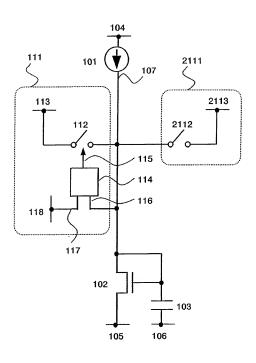


FIG. 21




FIG. 22

. 3




FIG. 23




FIG. 24




FIG. 25

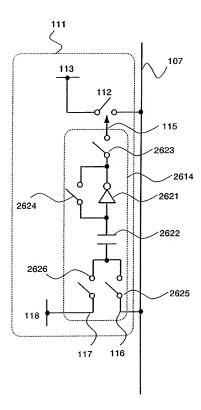


FIG. 26

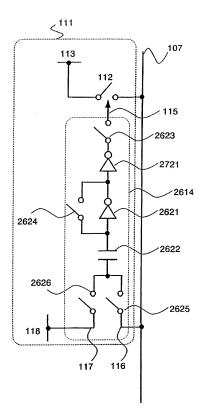


FIG. 27




FIG. 28

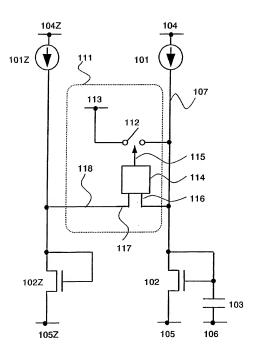


FIG. 29

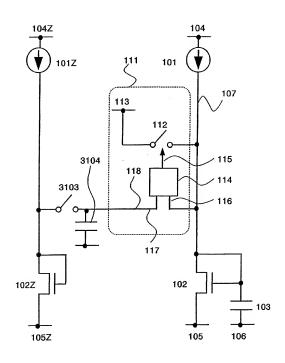


FIG. 30

 $\hat{()}$ 

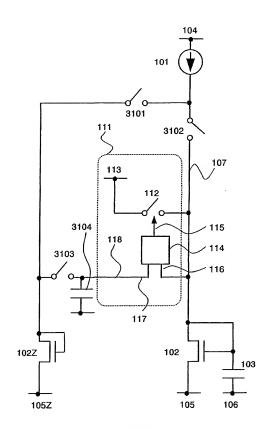


FIG. 31

Ö

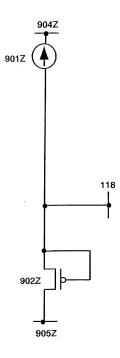


FIG. 32




FIG. 33






FIG. 34

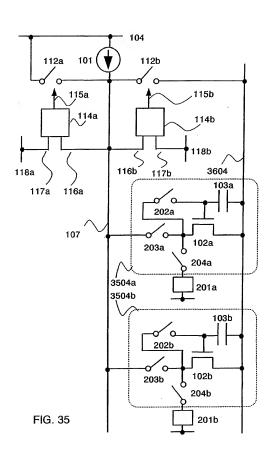

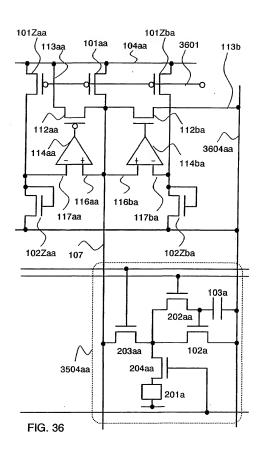

- ". [ ]




FIG. 37

 $(\tilde{\ })$ 




FIG. 38

t J




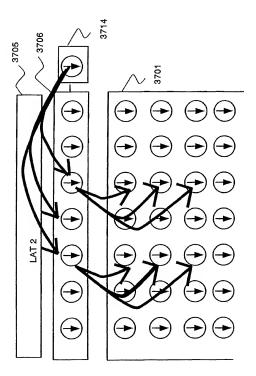


FIG. 39

1, 1

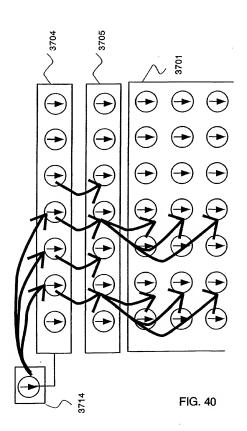

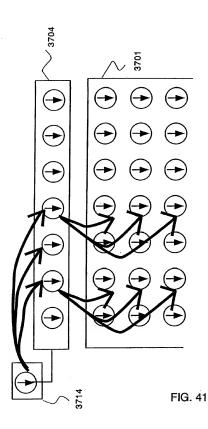

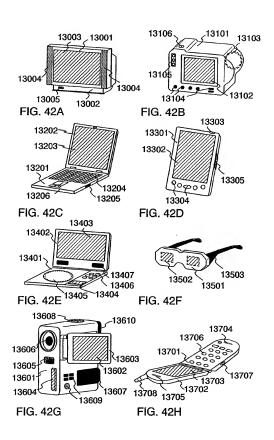

0

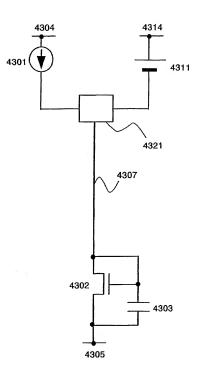


FIG. 43

